




Strongboxes grade IV and grade V

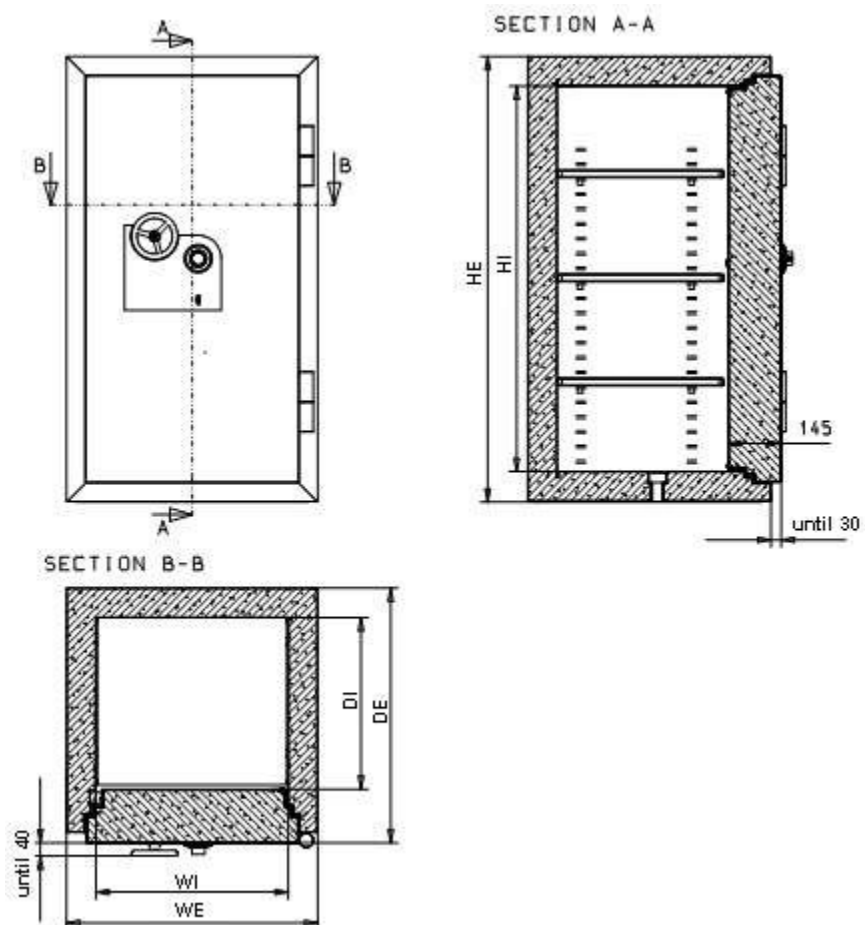

Strongboxes – series of types:

Models	External dimensions			Internal dimensions				Capacity dm ³	Weight (kg) ±10% *		Door opening radius
	H	W	D	H	W	D	Int. Width (in trade)		Grade IV	Grade V	
KP 67	670	680	685	510	520	460	505	120	581	597	600
KP 100	1000			840				197	806	828	
KP 120	1200			1040				244	943	968	
KP 150	1500			1340				314	1148	1178	
KPP 120	1200	800	775	1040	640	550	625	360	1161	1192	720
KPP 150	1500			1340				464	1403	1440	
KPP 180	1800			1640				577	1645	1688	

*estimated weight

The overall external dimensions are a result of external product measurement (Ext. Depth) and the handle knob being the most protruding element.

Technical parameters:

- Four movable horizontal bolts
- Four fixed horizontal bolts
- Overall casing thickness # 80 mm,
- Door thickness # 145 mm,
- External casing sheet thickness: 2 mm,
- Internal casing sheet thickness: 1,5 mm,
- Door opening radius 180°,
- Hole at the bottom \varnothing 28 mm for expansion anchor M16 x 200
- Round handle

Models	Handle knob	
	Height	Diameter
KP 67	32	80
KP 100	40	125
KP 120	40	125
KP 150	40	125
KPP 120	40	125
KPP 150	40	125
KPP 180	40	125

Locks

- coded mechanical lock class C
- key lock class C

Suggested configurations of locks

- coded (mechanical) and key lock
- two key locks

Standard accessories

1. Key lock class C, and coded mechanical lock class C
2. Shelves – maximum load per shelf – 50 kg

Models	No. shelves
KP 67	1
KP 100	2
KP 120, KPP 120	3
KP 150, KPP 150	4
KPP 180	4

Possible smooth shelf suspension regulation

Shelf hooks – 4 pieces per shelf

3. One expansion screw for fitting to the base.
4. Two keys for key lock.
5. Key for code change in the installed coded mechanical lock.
6. Service manual of coded locks
7. Colour RAL 7035, RAL 9005, the remaining colours from the RAL palette
8. Lead of alarm system wiring
9. Threaded hole with M24 thread for mounting of couplings for transportation

Additional accessories

1. Safe deposit box

Models	Height	Width	Depth	Door opening	
				Height	Width
KP 67	278	510	446	180	385
KP 100					
KP 120					
KP 150					
KPP 120		630	535		505
KPP 150					
KPP 180					

The chamber is locked individually with a key lock. Standard version is fitted with one safe deposit box (T marking). Additional safe deposit boxes may be installed on personal request, also at the bottom of the main strongbox (in such case the customer assembled the safe deposit box according to the instruction manual).

2. Bolt-position & door-opening sensors